








RoHS



WITH CAP

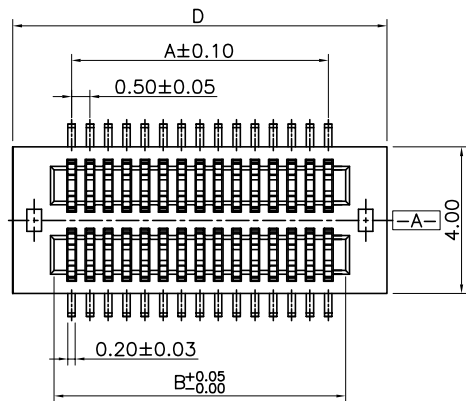


MATING DRAW (REF)

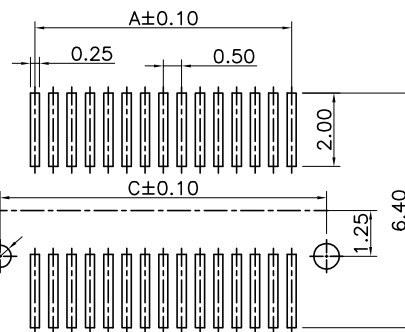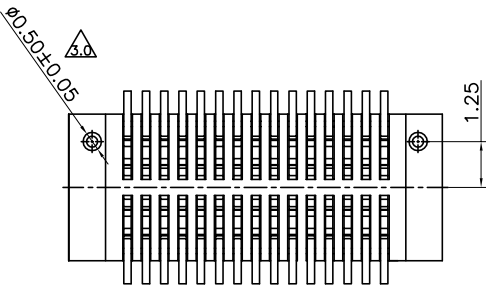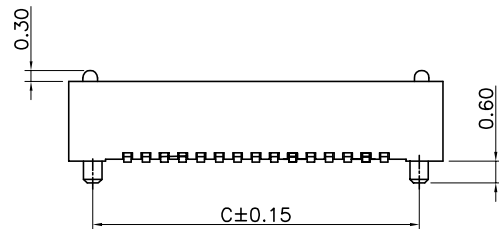

RECOMMENDED PCB LAYOUT

NO.	COMPONENTS	MATERIALS	SPECIFICATION:FINISH/COLOR	QTY.
1	HOUSING	LCP,NYLON9T UL94V-0	NATURAL/BLACK	1
2	TERMINAL	BRASS	THE SURFACE: Au(LAST)	N
3	CAP	LCP,NYLON9T UL94V-0	NATURAL/BLACK	1

NOTE:
1.ALL MATERIAL MUST BE COMPLY WITH RoHS.
2.PART NO. LEGEND:

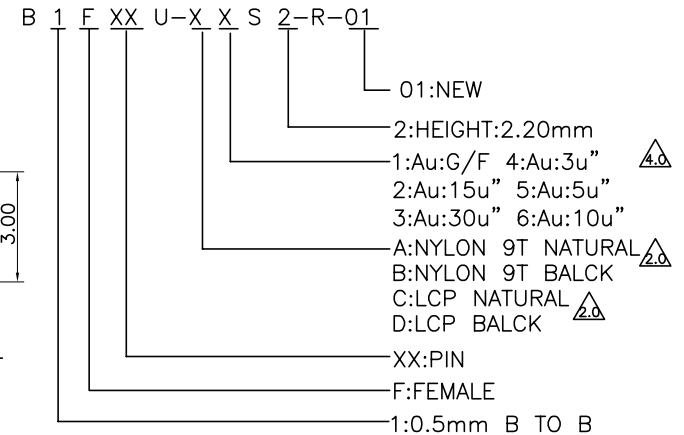

- ELECTRICAL PERFORMANCE
1. RATED VOLTAGE(MAX.):50V AC/DC
 2. RATED CURRENT(MAX.):0.5A AC/DC
 3. CONTACT RESISTANCE:40 MILLIOHM MAX.
 4. INSULATION RESISTANCE:100 MEGOHMS MIN. 250V DC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL
 5. DIELECTRIC STRENGTH: 250V AC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL NO BREAKDOWN
 6. OPERATING TEMPERATURE: -25° to +85°

Pin	A	B	C	D
2x5	2.00	2.90	3.90	5.20
2x6	2.50	3.40	4.40	5.70
2x7	3.00	3.90	4.90	6.20
2x8	3.50	4.40	5.40	6.70
2x9	4.00	4.90	5.90	7.20
2x10	4.50	5.40	6.40	7.70
2x11	5.00	5.90	6.90	8.20
2x12	5.50	6.40	7.40	8.70
2x13	6.00	6.90	7.90	9.20
2x14	6.50	7.40	8.40	9.70
2x15	7.00	7.90	8.90	10.20
2x16	7.50	8.40	9.40	10.70
2x17	8.00	8.90	9.90	11.20
2x18	8.50	9.40	10.40	11.70
2x19	9.00	9.90	10.90	12.20
2x20	9.50	10.40	11.40	12.70
2x22	10.50	11.40	12.40	13.70
2x23	11.00	11.90	12.90	14.20
2x24	11.50	12.40	13.40	14.70
2x25	12.00	12.90	13.90	15.20
2x26	12.50	13.40	14.40	15.70
2x27	13.00	13.90	14.90	16.20
2x28	13.50	14.40	15.40	16.70
2x29	14.00	14.90	15.90	17.20
2x30	14.50	15.40	16.40	17.70

5.0				DRAWING:	GENERAL TOLERANCE	<p>CHIN-BAN electronics (H.K) co., ltd</p>
4.0	2016.6.3	追加电镀规格	Tian hai	Henry	.X:±0.30 .X':±2" .XX:±0.20 .XX':±1" .XXX:±0.10 .XXX':±0.5"	
3.0	2014.12.17	修订定位柱尺寸公差	XiaoYong	CHECKED:	UNIT: MM PROJECTION:	
2.0	2014.9.19	ADDITIONAL NATURAL COLOR	XiaoYong	Tian hai	SCALE: 1/1	
1.0	2014.9.12	NEW	XiaoYong	APPROVAL:	SHEET: 1/1	
NO.	DATE	DESCRIPTION	APPROVAL	Tian hai		DESCRIPTION: 0.5mm Board to Board Female 2.20mm Height(NEW) PART NO: B1FXXU-XXS2-R-01 REV: 4.0 DRAWING NO: UK0151 SIZE: A4