




RoHS



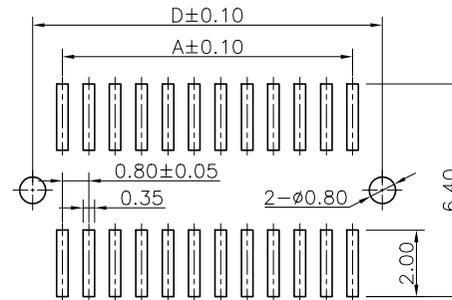


MATING HEIGHT:5.20mm

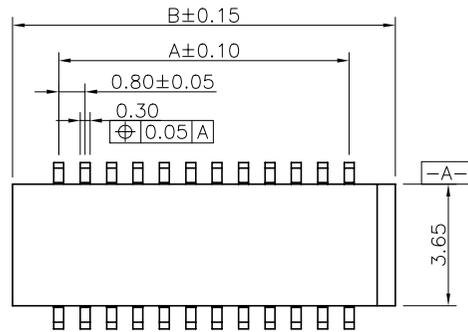

RECOMMENDED P.C.B LAYOUT

CIRCUITS	DIM A	DIM B	DIM C	DIM D
2x5	3.20	6.00	4.80	5.00
2x6	4.00	6.80	5.60	5.80
2x7	4.80	7.60	6.40	6.60
2x8	5.60	8.40	7.20	7.40
2x9	6.40	9.20	8.00	8.20
2x10	7.20	10.00	8.80	9.00
2x11	8.00	10.80	9.60	9.80
2x12	8.80	11.60	10.40	10.60
2x13	9.60	12.40	11.20	11.40
2x14	10.40	13.20	12.00	12.20
2x15	11.20	14.00	12.80	13.00
2x16	12.00	14.80	13.60	13.80
2x17	12.80	15.60	14.40	14.60
2x18	13.60	16.40	15.20	15.40
2x19	14.40	17.20	16.00	16.20
2x20	15.20	18.00	16.80	17.00
2x12	16.80	19.60	18.40	18.60
2x13	17.60	20.40	19.20	19.40
2x24	18.40	21.20	20.00	20.20
2x25	19.20	22.00	20.80	21.00

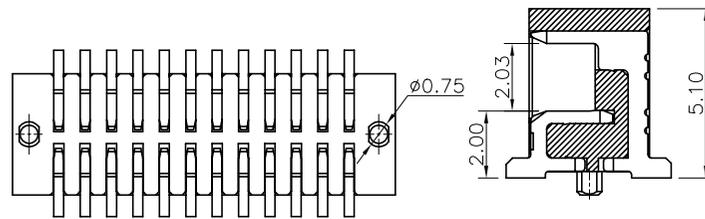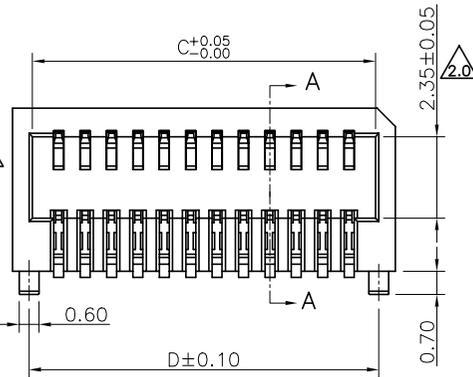

SECTION:A-A

材料说明:

- 1.主体: NYLON 9T(UL94V-0)  
颜色: 本色
- 2.端子: BRASS


电气性能

- 1.额定电压: 50V AC/DC
- 2.额定电流: 0.5 A AC/DC
- 3.绝缘耐压: 相邻端子间施加250V AC 1分钟 无损坏
- 4.绝缘阻抗: 500MΩ MIN  
250V DC 1分钟
- 5.接触阻抗: 30mΩ Max
- 6.使用温度: -25℃~+85℃

ORDERING INFORMATION

B 2 F XX U - C X R X - R  
(1)(2)(3)(4) (5)(6)(7)(8) (9)

1. SERIES NO.
- 2: 0.8mm BOARD TO BOARD CONNECTOR
- MALE & FEMALE TYPE  
F: FEMALE
- NUMBER OF PIN  
XX: XX POSITIONS
- TAIL CONSTRUCTION TYPE  
U: SMD TYPE
- HOUSING COLOR CODES AND MATERIAL  
C: COLOR:NATURAL COLOR AND MATERIAL:PA9T
- CONTACT PLATING  
1: GOLD FLASH OVER ALL  
2: 15u" GOLD PLATING OVER ALL  
3: 30u" GOLD PLATING OVER ALL
- MALE & FEMALE INFIX TYPE  
R: RIGHT ANGLE
- ADDED CODE  
1. POST  
2. WITHPOST
- PACKING: REEL



5.0			
4.0			
3.0	2014.10.21	产品尺寸修正	xiao yong
2.0	2012.06.25	修改产品尺寸	Match
1.0	2011.08.22	NEW	Match
NO.	DATE	DESCRIPTION	APPROVAL

DRAWING:	Match
CHECKED:	
APPROVAL:	
GENERAL TOLERANCE	.X:=±0.20 .X*:=±2° .XX:=±0.10 .XX*:=±1° .XXX:=±0.05 .XXX*:=±0.5°
UNIT: MM	PROJECTION:
SCALE: 1/1	
SHEET: 1/1	



**CHIN-BAN**  
electronics (H.K) co., ltd

DESCRIPTION:	0.8mm Board to Board Socket R/A Type	
PART NO:	B2FXXU-CXRX-R	REV: 3.0
DRAWING NO:	UG0174	SIZE: A4