



ROHS+REACH

REV.	DATE	DESCRIPTION	APPROVAL
X0	2017.02.06	NEW PRODUCT	wuchanghua

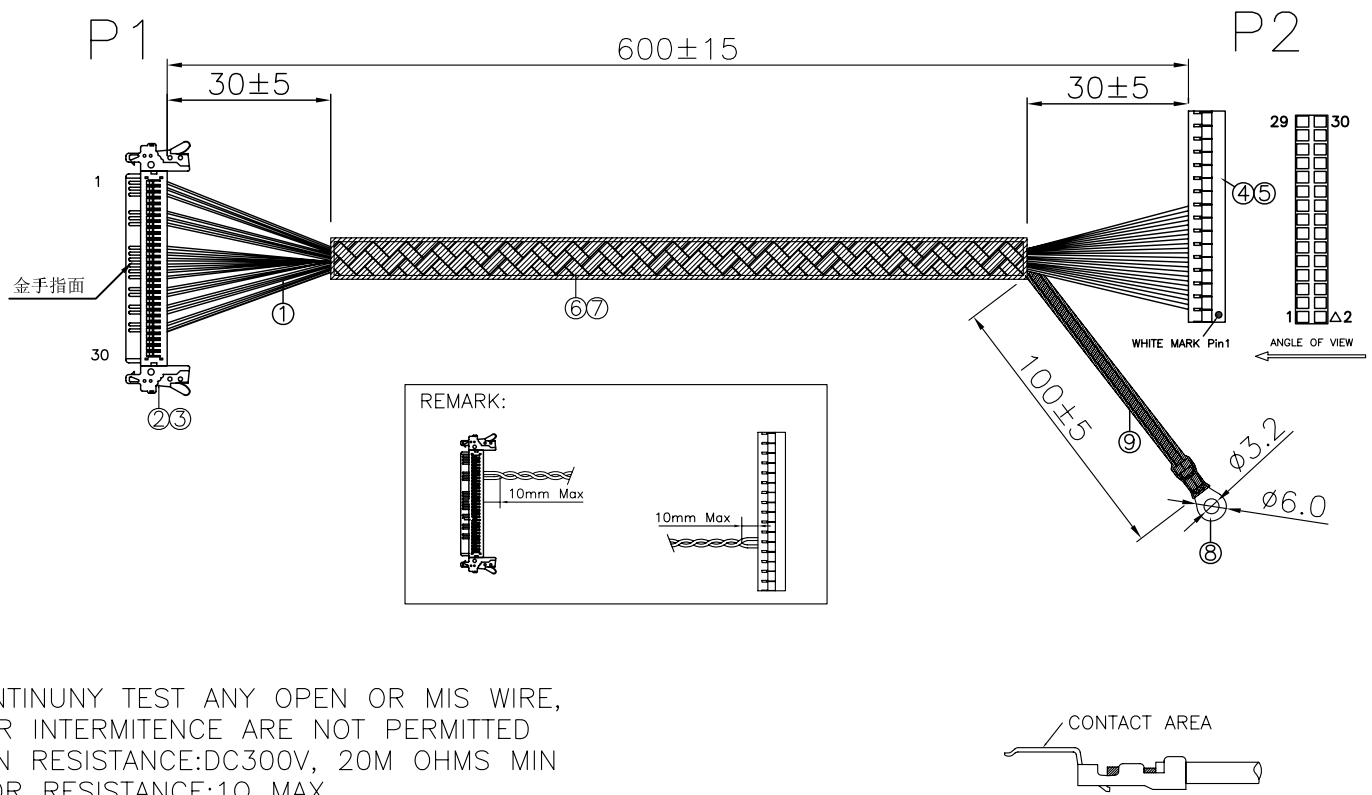

WIRING TABLE

P1	P2
1	RED 1
2	RED 2
3	RED 3
4	NC
5	NC
6	BLACK 4
7	BLACK 5
8	BLACK 6
9	NC
10	NC
11	NC
12	BLACK 13
13	BLUE 18
14	WHITE 17
15	BLACK 14
16	BLUE 16
17	WHITE 15
18	NC
19	BLUE 12
20	WHITE 11
21	NC
22	BLUE 10
23	WHITE 9
24	NC
25	BLUE 8
26	WHITE 7
27	NC
28	NC
29	NC
30	NC

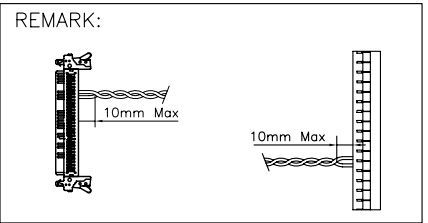

NOTES:
 1.100% CONTINUNY TEST ANY OPEN OR MIS WIRE, SHORT OR INTERMITENCE ARE NOT PERMITTED
 2.INSULATION RESISTANCE:DC300V, 20M OHMS MIN
 3.CONDUCTOR RESISTANCE:1Ω MAX

⑨	TUBE	SHRINK TUBE:φ4.0x100MM 125°C 600V BLACK	1PCS	
⑧	TERMINAL	R TYPE TERMINAL: ID=3.2MM W=6.0MM TIN-PLATED BRASS	1PCS	
⑦	TAPE	ACETATE TAPE: W=30MM BALCK	1PCS	
⑥	BRAID	BRAID TUBE: TINNED COPPER 168/0.12	1PCS	
⑤	TERMINAL	CRIMPING TERMINAL PHOSPHOR BRONZE, CONTACT AREA: G/F,	18PCS	
④	HOUSING	DOUBLE ROW SOCKET PITCH:2.0mm-2*15PIN BLACK	1PCS	
③	TERMINAL	CRIMPING TERMINAL PHOSPHOR BRONZE, CONTACT AREA: G/F,	18PCS	
②	HOUSING	SINGLE ROW SOCKET PITCH:1.0mm*30PIN BLACK	1PCS	
①	WIRE	UL1571 28AWG 80°C 30V INSULATION:PVC OD:0.6mm	28PCS	
ITEM	TITLE	SPECIFICATION	Q'TY	CHIN-BAN P/N

DRAWING: *changhua* 2017.02.06
 CHECKED: *Ricky* 2017.02.06
 APPROVAL: *Cykin* 2017.02.06

TOLERANCE
 .X:=±0.50
 .XX:=±0.30
 .XXX:=±0.10
 .X°:=±2°

DESCRIPTION:
LVDS CABLE L=600mm

UNIT: mm
 SCALE:N/A
 SHEET:1/1

CUSTOMER:
 CUSTOMER P/N:
 DRAWING NO: A-HSHS-06IT-J072

REV: X0
 DEF. UK
 SIZE: A4