


ROHS+REACH

REV.	DATE	DESCRIPTION	APPROVAL
X0	2017.08.01	NEW PRODUCT	wuchanghua
X1	2017.09.19	DRAWING UP	wuchanghua

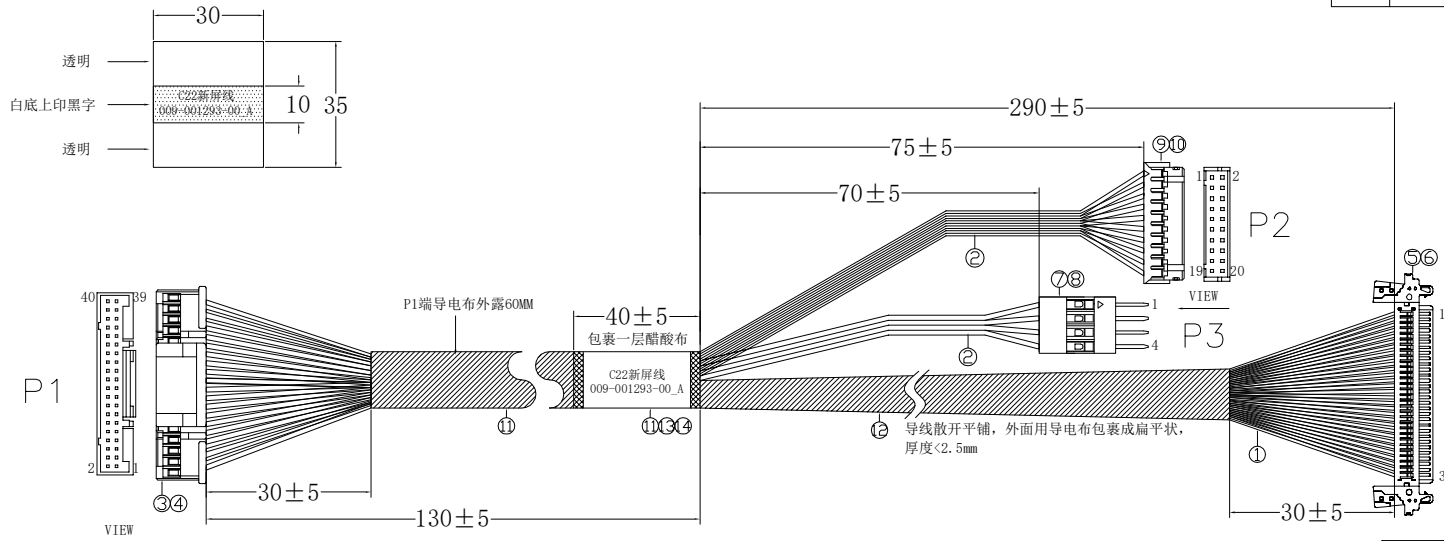

WIRING TABLE

P1	P2	P4
1	红色	3
2	红色	2
	红色	1
3	∅0.6红色	27
4	∅0.6红色	28
5	∅0.6红色	2
	∅0.6红色	3
6	∅0.6红色	21
	∅0.6红色	22
7	红色	4
8	∅0.6白色	25
9	黑色	5
	黑色	6
10	红色	11
11	白色	18
12	白色	17
13	黑色	19
	黑色	20
14	白色	13
15	白色	15
16	白色	9
17	白色	14
18	白色	7
19	∅0.6黑色	1
	∅0.6黑色	4
20	白色	8
21	白色	12
22	白色	10
	∅0.6白色	24
23	∅0.6黑色	29
24	∅0.6黑色	30
29	∅0.6黑色	23
	∅0.6黑色	26
30	∅0.6黑色	19
	∅0.6黑色	20
31	∅0.6蓝色	17
32	∅0.6白色	18
33	∅0.6蓝色	14
34	∅0.6白色	15
35	∅0.6蓝色	11
36	∅0.6白色	12
37	∅0.6黑色	13
	∅0.6黑色	16
38	∅0.6黑色	7
	∅0.6黑色	10
39	∅0.6蓝色	8
40	∅0.6白色	9

WIRING TABLE

P1	P3	
25	白色	4
26	白色	2
27	白色	1
28	白色	3

无指定的线材使用∅0.9

P1端2, 5, 6, 9, 13, 19, 22, 29, 30, 37, 38
此11个点分别合压端子

NOTES:
 1.100% CONTINUY TEST ANY OPEN OR MIS WIRE, SHORT OR INTERMITENCE ARE NOT PERMITTED
 2.INSULATION RESISTANCE:20M OHMS MIN
 3.CONDUCTOR RESISTANCE:1Ω MAX

ITEM	TITLE	SPECIFICATION	Q'TY	CHIN-BAN P/N
14	LABLE	30*35mm PVC lable printing:c22新屏线 0040-009-001293-00_A	1PCS	
13	TAPE	w=20mm acetate tape	1PCS	
12	TAPE	w=40mm*L100 conductive cloth	1PCS	
11	TAPE	w=40mm*L280 conductive cloth	1PCS	
10	HSG	double row socket pitch2.0mm*2*10pin housing pa66 white	1PCS	
9	TER	pitch2.5mm crimping terminal phosphor bronze tin-plated 24-28awg	19PCS	
8	HSG	single row socket pitch2.5mm*2pin housing pbt black	1PCS	
7	TER	pitch2.5mm crimping terminal brass tin-plated 22-26awg	4PCS	
6	HSG	single row socket pitch1.0mm*30pin housing heat resisting plastic beige	1PCS	
5	TER	pitch1.0mm crimping terminal copper alloy gold-plated 30-36awg	28PCS	
4	HSG	Double row socket Pitch2.0mm*2*20PinHousing PA66 WHITE	1PCS	
3	TER	Pitch2.0mm crimping terminal phosphor bronze tin-plated 24-28AWG	40PCS	
2	WIRE	ul1571 28awg 80℃ 30v insulation:pvc od:0.9mm red,black,white	23PCS	
1	WIRE	ul1571 28awg 80℃ 30v insulation:pvc od:0.6mm red,black,blue,white	28PCS	

DRAWING: Changhua 2017.08.01
 CHECKED: Ricky 2017.08.01
 APPROVAL: Cykin 2017.08.01

TOLERANCE
 .X:=±0.50
 .XX:=±0.30
 .XXX:=±0.10
 .X':=±2°

DESCRIPTION:
WIRE HARNESS

UNIT: mm	CUSTOMER:	REV: X1
SCALE:N/A	CUSTOMER P/N:	DEF: UK
SHEET:1/1	DRAWING NO: A-HSHS-09FQ-J409	SIZE:A4